

[Product Brief]

Ver.1.0

IMX208

Diagonal 3.11 mm (Type 1/5.78) 2.12 M Pixel CMOS Image Sensor with Square Pixel for Color Cameras

Description

The IMX208 is a diagonal 3.11 mm (Type 1/5.78) back-illuminated type CMOS image sensor with a square pixel array and approx. 2.12M active pixels. Adoption of column parallel A/D converter realized high-speed processing and changing fundamental structure to back-illuminated type enhanced imaging characteristics including sensitivity and low noise. R, G, and B pigment primary color mosaic filter is employed. High sensitivity, low dark current features are achieved. It equips an electronic shutter with variable integration time. It operates with three power supply voltages: analog 2.7 V, digital 1.2 V and 1.8 V for input/output interface and achieves low power consumption. In addition, this product is designed for use in pc camera, tablet pc and cellular phone. When using this for another application, Sony does not guarantee the quality and reliability of product.

Therefore, don't use this for applications other than pc camera, tablet pc and cellular phone. Consult your Sony sales representative if you have any questions.

Function and Features


- ◆ Back-illuminated CMOS image sensor Exmor R™
- ◆ 2-wire serial communication circuit on chip
- ◆ CSI2 serial data output (selection of 1 Lane/2 Lane) on chip
- ◆ Timing generator, H and V driver circuits on chip
- ◆ CDS/PGA on chip
- ◆ 10-bit A/D converter on chip
- ◆ Automatic optical black (OB) clamp circuit on chip
- ◆ PLL on chip (rectangular wave/sine wave)
- ◆ High sensitivity, low dark current, no smear, excellent anti-blooming characteristics
- ◆ Variable-speed shutter function (Minimum unit: One horizontal sync signal period)
- ◆ R, G, B primary color pigment mosaic filters on chip
- ◆ Max. 60.05 frame/s in all-pixel scan mode
- ◆ Pixel rate: 162.0 MHz (all pixels, 2 Lane, 60 frame/s)
- ◆ Supports 720/60 p, 1080/30 p, 1080/60 p drive *NOTE
- ◆ Up/down and/or right/left inversion function
- ◆ Pixel sub-sampling readout function
- ◆ Image cutout function
- ◆ Power-on sequence free
- ◆ OTP ROM (One Time Programmable Read Only Memory) 30 byte
- ◆ Ambient Light Sensor (ALS)

NOTE) Please ask about the details of a required register.*

Device Structure

- ◆ CMOS image sensor
- ◆ Image size : Diagonal 3.11 mm (Type 1/5.78)
- ◆ Total number of pixels : 1952 (H) × 1136 (V) approx. 2.22 M pixels
- ◆ Number of effective pixels : 1952 (H) × 1112 (V) approx. 2.17 M pixels
- ◆ Number of active pixels : 1936 (H) × 1096 (V) approx. 2.12 M pixels
- ◆ Chip size : 4.245 mm (H) × 2.783 mm (V)
- ◆ Unit cell size : 1.4 μm (H) × 1.4 μm (V)
- ◆ Substrate material : Silicon

Block diagram

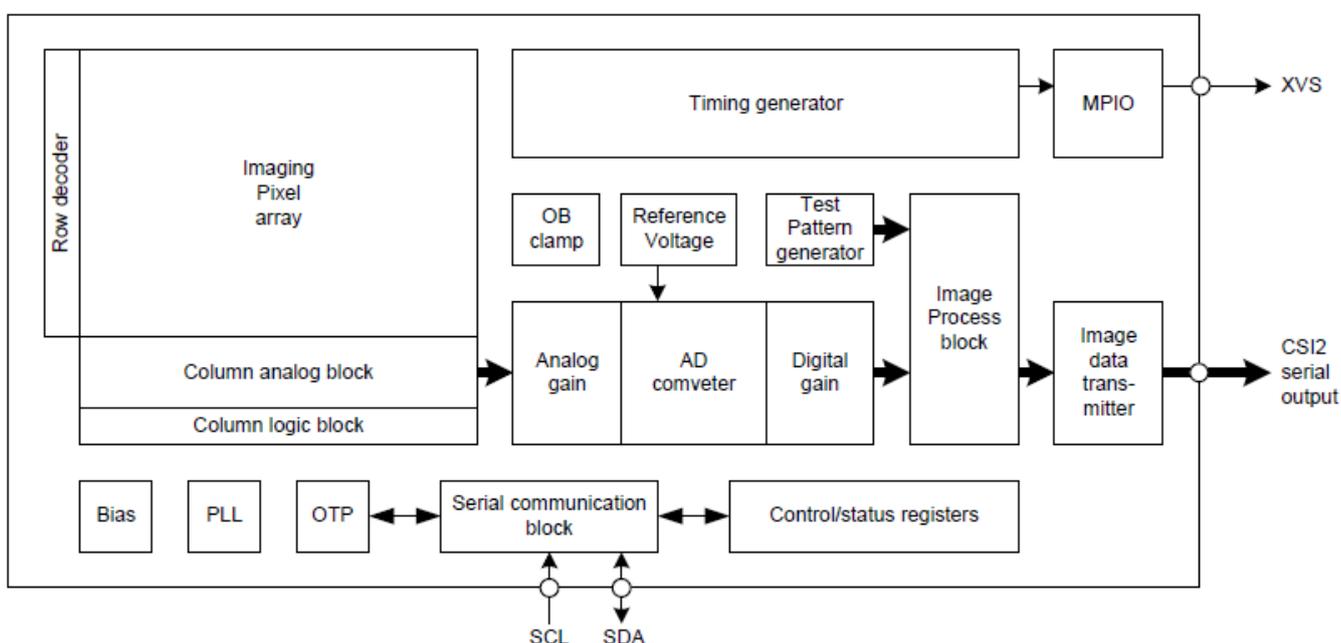

Exmor R

* Exmor R is a trademark of Sony Corporation. The Exmor R is a Sony's CMOS image sensor with significantly enhanced imaging characteristics including sensitivity and low noise by changing fundamental structure of Exmor™ pixel adopted column parallel A/D converter to back-illuminated type.

Sony reserves the right to change products and specifications without prior notice.

This information does not convey any license by any implication or otherwise under any patents or other right.

Application circuits shown, if any, are typical examples illustrating the operation of the devices. Sony cannot assume responsibility for any problems arising out of the use of these circuits.